

**291216 (ZVR2400H)**

Bench type Refrigerated Show Case 2400 mm

Main Features

- Complies with main international certification bodies and is CE marked.
- Supplied for use without the protective glass panels (side, back and top) which must be ordered separately as accessories.
- Designed for use with the specific sets of stainless steel 1/4 and 1/2 GN containers (without lids) which are available as accessories.
- Showcase suitable to accommodate ¼ and ½ GN trays available as accessories.
- Tropicalized unit.

Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Showcase provided with power supply cable exit on left or back sides to suit all type of installations.

User Interface & Data Management

- Connect the product (with accessory) to the OneConnected Platform via Wi Fi or ethernet connection for a seamless remote experience. Real-time monitoring and analytics, alarm management, HACCP data management, APIs, and advanced features keep your fridge fully under control.





A focus on sustainability

Sustainability

- Provided with its own integral, highly efficient refrigeration unit with low noise emission and reduced energy consumption. Temperature thermostatically controlled.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.

Certifications & Recognitions



International system for mutual acceptance of test reports and certificates concerning the safety of electrical and electronic components, equipment, and products.



Product assessed by the manufacturer and deemed to meet EU safety, health, and environmental protection requirements.



Product placed on the Great Britain market and complies with UK regulations and standards.



Find out more:
ISO Certificates
[Electrolux Professional Recognitions](#)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026/08/08

2/5

Technical specifications

Electric

Supply voltage:	220-240 V/1 ph/50 Hz
-----------------	----------------------

Key Information:

External dimensions, Width:	2400 mm
External dimensions, Depth:	350 mm
External dimensions, Height:	250 mm
Net weight:	51 kg

Refrigeration Data

Control type:	Digital
Operating temperature min.:	0 °C
Operating temperature max.:	10 °C

Sustainability


Refrigerant type:	R290
Refrigeration power:	314 W

ISO Certificates


ISO Standards:	ISO 9001; ISO 14001; ISO 45001; ISO 50001
Type reference/certification group:	ZVR24HC

Installation drawings


Front

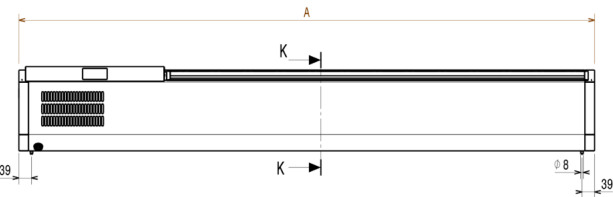

Side



Other



E1 = Electrical inlet (power)

Accessories

Optional Accessories

PNC Code	Description
Other accessories	
291499	Glass panels for refrigerated showcase, 2400 mm
921853	GN containers for refrigerated 2400 mm show case - n. 6x1/4 + n. 3x1/2 h. 150 mm

Recommended Detergents

PNC Code	Description
0S2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
0S2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
0S2884	S04 Glasses & Hard Surfaces Cleaner, 6 x 750ml bottles
0S3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity