**R290** **730333 (ICC56I25SNP)**

Ice Maker, Cube (40gr), 56 kg/24h, self-contained, 25kg ice collection bin included, water-cooled

Main Features

- Compliant to CE requirements for safety.
- Food grade ABS interior.
- Fully automatic in operation.
- Suitable for gravity drain only.
- Compact dimensions of the ice cubers make them highly suitable for any location, particularly those where space is at a premium.
- Water consumption and productivity calculated using 15°C water temperature and 21°C ambient temperature.
- The ice-making method (spray layering) guarantees crystalline, compact, hygienically pure ice cubes that are resistant to melting.
- Bin included.
- Ice cube pyramid-trunk shape.
- The ice making method guarantees a continuous and reliable production.
- Easy cleanability guaranteed by an automatic system: the cleaning switch activate the circulation and the rinse of water; at the end of the cycle just swithed again to start producing ice.
- Rounded internal corners of the bin assure ease of cleaning.
- The innovative anti-scale spray system with flexible nozzles avoids limescale deposits through small vibrations.

Construction

- Easy access to the main components for maintenance.
- Plug as standard (schuko type).
- AISI 304 stainless steel exterior.
- The sprayers are easy to take away, permit a simple flowing and prevent limestone formation.
- ON-OFF rocker switch.
- Adjustable 105-155mm feet.
- Internal ice containers in ABS.
- Reliability guaranteed by the quality of the construction materials used (front, top and sides in 304 AISI stainless steel) and the sophisticated product and process technology involved.
- Hygienical plastic spray arms removable without the use of tools.
- Aluminium evaporator ensures a safe contact with ice.
- Sturdy door opening system made in AISI 304 stainless steel.



- Supplied with flexible water supply, drain hoses and scoop.

Sustainability

- Reduced energy consumption by fully insulated storage bin.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

Optional Accessories

PNC Code	Description
Feet, wheels and ramps	
880692	Kit of 4 small black feet, 13mm (0/+22mm)
Other accessories	
OS1628	Purity C 150 Quell ST system with flow meter
OS1629	Purity C 300 Quell ST system with flow meter
880690	Drain pump kit

Recommended Detergents

PNC Code	Description
OS2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
OS2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
OS2884	S04 Glasses & Hard Surfaces Cleaner, 6 x 750ml bottles
OS3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity



Technical specifications

Electric

Supply voltage:	220-240 V/1N ph/50 Hz
-----------------	-----------------------

Water:

Water outlet size:	25mm
--------------------	------

Capacity:

Bin capacity:	25 kg
---------------	-------


Key Information:

External dimensions, Width:	535 mm
External dimensions, Depth:	595 mm
External dimensions, Height:	894 mm
Net weight:	56 kg
Output:	56 kg/day
Kind of cube:	Ice Cube 40 g


Sustainability

Refrigerant type:	R290
Refrigerant weight:	65 g
Water consumption:	30.5 lt/hr


Front

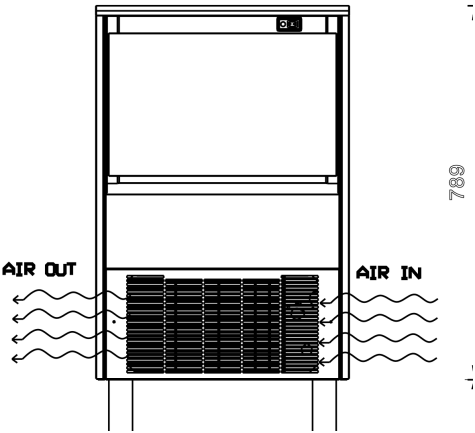

Side

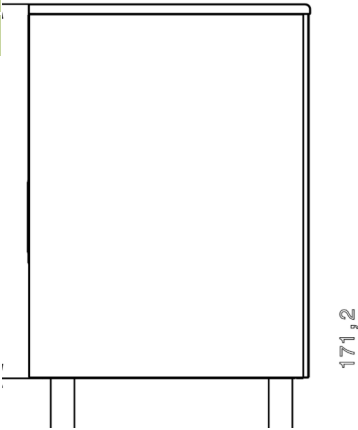

Top

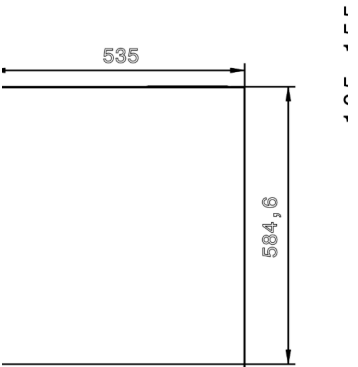

CW11 = Cold Water inlet 1 (cleaning)

D = Drain

EI = Electrical inlet (power)



Find out more:
ISO Certificates
[Electrolux Professional Recognitions](#)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.