

**R290** **730336 (IGE55I20SNP)**

Ice Maker, Granular Ice XS, 74 kg/24h, self-contained, 20kg ice collection bin included, air-cooled

Main Features

- Compliant to CE requirements for safety.
- Food grade ABS interior.
- Fully automatic in operation.
- Suitable for gravity drain only.
- Water consumption and productivity calculated using 15°C water temperature and 21°C ambient temperature.
- Bin included.
- The ice-making method (crushing system) guarantees compact, hygienically pure crushed ice that is resistant to melting.
- The ice making method guarantees a continuous and reliable production.
- Easy cleanability guaranteed by an automatic system: the cleaning switch activate the circulation and the rinse of water; at the end of the cycle just swithed again to start producing ice.
- Rounded internal corners of the bin assure ease of cleaning.

Construction

- Plug as standard (schuko type).
- AISI 304 stainless steel exterior.
- ON-OFF rocker switch.
- Adjustable 105-155mm feet.
- Internal ice containers in ABS.
- Reliability guaranteed by the quality of the construction materials used (front, top and sides in 304 AISI stainless steel) and the sophisticated product and process technology involved.
- AISI 316 evaporator ensures a safe contact with ice.
- Sturdy door opening system made in AISI 304 stainless steel.
- Supplied with flexible water supply, drain hoses and scoop.

Sustainability

- Reduced energy consumption by fully insulated storage bin.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.



Optional Accessories

PNC Code	Description
Feet, wheels and ramps	
880692	Kit of 4 small black feet, 13mm (0/+22mm)
Other accessories	
880690	Drain pump kit

Recommended Detergents

PNC Code	Description
OS2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
OS2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
OS2884	S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML
OS3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity



Technical specifications

Electric

Supply voltage:	220-240 V/1N ph/50 Hz
Electrical power max.:	0.55 kW

Water:

Water outlet size:	25mm
--------------------	------

Capacity:

Bin capacity:	20 kg
---------------	-------


Key Information:

External dimensions, Width:	465 mm
External dimensions, Depth:	595 mm
External dimensions, Height:	894 mm
Net weight:	55 kg
Output:	74 kg/day


Sustainability

Refrigerant type:	R290
Refrigerant weight:	90 g
Water consumption:	3.1 lt/hr


Front

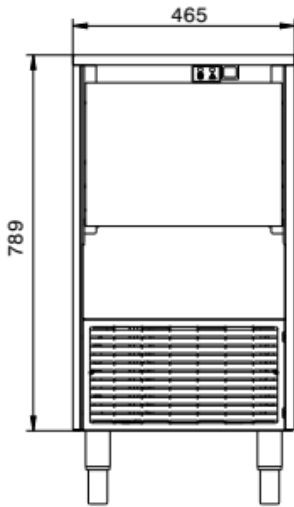

Side

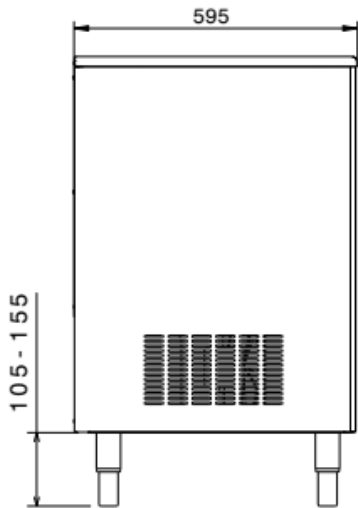

Top



CW11 = Cold Water inlet 1 (cleaning)

D = Drain

EI = Electrical inlet (power)



Find out more:
ISO Certificates
[Electrolux Professional Recognitions](#)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026/05/28

3/3