



Ice Cube

CB 184 HC

Self-contained ice maker - Sprayer system
Daily production up to 23 kg

Hotel	●	●	●	●	●	●	●	●	●
Restaurant	●	●	●	●	●	●	●	●	●
Fast food	●	●	●	●	●	●	●	●	●
Bar	●	●	●	●	●	●	●	●	●
Disco	●	●	●	●	●	●	●	●	●
Fish markets	●	●	●	●	●	●	●	●	●
Supermarkets	●	●	●	●	●	●	●	●	●
Medical & SPA	●	●	●	●	●	●	●	●	●
Industry	●	●	●	●	●	●	●	●	●

► Features & Plus



ABS version available



► Features & Plus

- Compact and crystal cube
- AISI 304 SS Scotch Brite finish
- Tropical Class + 43 ° C
- Cleanable antiscall filter
- Air or water cooling systems
- Easy cleaning internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Standard and special voltage



- Patented sprayer slide



- HFC Free



- Automatic Washing system



- ABS version available



AISI 304 SS Scotch Brite or ABS finish



Cleanable antiscall Patented sprayer slide filter



Disappearing insulated door



Patented sprayer slide

2 Years Warranty subject to limitations

► Certifications available for this model



www.bremaice.it
info@bremaicegroup.it

We are Brema Group






Ice Cube

CB 184 HC

Self-contained ice maker - Sprayer system
Daily production up to 23 kg

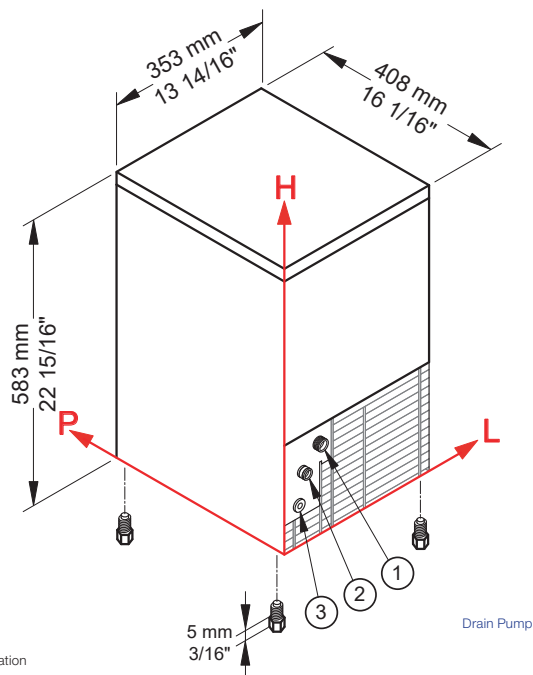

Installation



► Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Available ice cube size



► Performances

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
Air temperature	10° C	23 kg					
	50° F		51 lbs				
	21° C			21 kg			
	70° F				46 lbs		
	32° C					16 kg	
	90° F						35 lbs

► Connections standard version

- Water in.: 88 mm / 3 7/16" - 184 mm / 7 4/16" - 3/4"
- Water out.: 45 mm / 1 12/16" - 138 mm / 5 7/16" - 24 mm / 15/16"
- Electrical connections: 41 mm / 1 10/16" - 73 mm / 2 14/16"

All measures are referred to the rear bottom-left corner (L-H-Ø)

► Technical information

Production in 24h	21 kg / 46 lbs
Store capacity, up to	4 kg / 9 lbs
Cooling system	A - W
Kind of cube	D-13g
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Average power consumption	260 W
Fuse	10 A
Electrical consumption	35 kWh/100kg

All the technical information must be considered at the following conditions:

Sizes without feet

Standard Cube (13g)

Ambient temperature +21° C

Water temperature +15° C

Electrical consumption at +32° C (standard voltage)

Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Water consumption	A: 4 l/kg - 47,9 gal/100 lbs
	W: 25 l/kg - 299,6 gal/100 lbs
Sizes (L-P-H mm)	353 - 408 - 583
(L-P-H in)	13 14/16 - 16 1/16 - 22 15/16
Sizes with pack (L-P-H mm)	415 - 445 - 780
(L-P-H in)	16 5/16 - 17 8/16 - 30 11/16
Net weight	27,5 kg / 61 lbs
Gross weight	34 kg / 75 lbs
Finish	Stainless steel, 18/8, scotch brite - ABS Blue or Grey

Rev. 00 - Issued February 2026

We are Brema



www.bremaice.it
info@bremaicegroup.it

